


B720W Wireless HD 1MP Mini Bullet IP Camera




- 
1.0MP
- 
50m Range
- 
3.6mm Lens
- 
ONVIF
- 
D-WDR
- 
Day / Night
- 
IP66
- 
Remote Apps

FEATURES

Connect Wirelessly

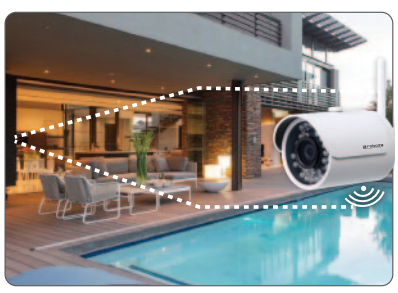

Crisp and Clear Videos

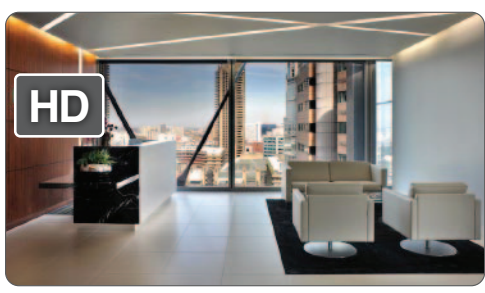

Neutralizing Shadows



- HD 1.0 MegaPixel 1/3" CMOS imaging device
 - H.264/MJPEG video compression, dual-stream encoding
 - 720 (1280 x 720) @ max 30 fps
 - Digital WDR, Day / Night (ICR), AWB, 3DNR, AGC, BLC
 - IR distance 30m
- Built-in 3.6mm lens
 - WiFi support
 - 12V DC
 - IP66 weatherproof
 - ONVIF compliant
 - Built-in web server, CMS, smartphone support



Best used in

- 
Organisations & Offices
- 
Industries
- 
Shops & Outlets
- 
Homes

SPECIFICATIONS

Model	B720W	
CAMERA		
Imaging Device	1/4" 1.0 Megapixel progressive scan CMOS	
Effective Pixels	1280(H)x720(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual 1/3(4)~1/10000	
Min. Illumination	Color: 0.01Lux/F1.8 ; 0Lux (IR on)	
S/N Ratio	More than 50dB	
Video Output	N/A	
CAMERA FEATURES		
IR Distance	30m (98ft)	
Day/Night	Auto (ICR) / Color / B/W	
Video Parameters	BLC /HLC /DWDR	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Digital Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
LENS		
Focal Length	3.6mm (6mm optional)	
Max . Aperture	F1.8(F1.8)	
Focus Control	Manual	
Angle of View	H: 59°(37°)	
Lens Type	Fixed lens	
Mount Type	Board - in Type	
VIDEO		
Compression	H.264B/H.264/MJPEG	
Resolution	720P(1280 × 720)/D1(704 × 576/704 × 480) /CIF(352 × 288/352 × 240)	
Frame Rate	Main Stream	720P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 448K ~ 8192Kbps	
AUDIO		
Compression	N/A	
Interface	N/A	
NETWORK		
Ethernet	RJ-45 (10/100Base-T)	
Wi-Fi	Wi-Fi(IEEE802.11b/g/n)	
Wi-Fi Range	50m(open field)	
Protocol	IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS	
Compatibility	ONVIF, CGI	
Max. User Access	5 users	
Mobile apps	iPhone, iPad, Android	
GENERAL		
Input Voltage / Current	DC12V	
Power Consumption	< 6.5W	
Operating Temperature / Humidity	-30°C~+50°C (-22°F~+122°F), Less than 95%RH	
Protection Degree	IP66	
Dimensions	Φ70 × 66 × 155mm (2.8 × 2.6 × 6.1")	
Weight	0.42Kg (0.93lb)	

DIMENSIONS

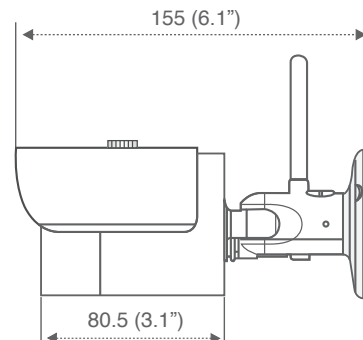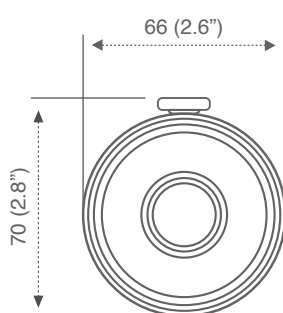

Unit: mm (inch)